

On Estimation of Parameter Uncertainty in Model-Based Clustering.

Adrian O'Hagan, Thomas Brendan Murphy and Isobel Claire Gormley.

October 5, 2015

Abstract

Mixture models are a popular tool in model-based clustering. Such a model is often fitted by a procedure that maximizes the likelihood, such as the EM algorithm. At convergence, the maximum likelihood parameter estimates are typically reported, but in most cases little emphasis is placed on the variability associated with these estimates. In part this may be due to the fact that standard errors are not directly calculated in the model-fitting algorithm, either because they are not required to fit the model, or because they are difficult to compute. The examination of standard errors in model-based clustering is therefore typically neglected. The widely used **R** package `mclust` has recently introduced bootstrap and weighted likelihood bootstrap methods to facilitate standard error estimation. This paper provides an empirical comparison of these methods (along with the jackknife method) for producing standard errors and confidence intervals for mixture parameters. These methods are illustrated and contrasted in both a simulation study and in the traditional *Old Faithful* data set.

Keywords: bootstrap; jackknife; `mclust`; mixture models; standard errors; weighted likelihood bootstrap

1 Introduction

The bootstrap (BS) and jackknife (JK) methods of re-sampling originated as a non-parametric means of estimating the variability of parameter estimates, or of estimating the parameters themselves (Quenouille, 1956; Tukey, 1958). These methods have since been documented and studied in great detail, in a wide range of modeling scenarios. The literature includes applications of the jackknife or bootstrap in isolation (see for example Efron & Stein (1981) and Efron (1994a) respectively) as well as applications of both methods together, exploring the synergy between them (Efron, 1981). This synergy encompasses the fact that the methods are asymptotically equivalent; as well as the fact that both methods derive from the same basic idea; notably the same concept that underlies the common parametric approaches to variance estimation. Therefore, while the algorithms for the two methods have traditionally been presented separately, it is important to note their shared objective: constructing new samples from the original data that allow us to gauge the variability of parameter estimates for the fitted model.

The methods can be helpful either in cases where the robustness of the parametric assumptions is in question, or when the second moments of the sampling distribution of the parameter estimates are difficult to compute. The former problem often arises when analyzing “small” data sets. The latter issue is often present in a model-based clustering setting, where the log-likelihood can become intractable for complex distributions. Indeed this may help to explain the lack of attention paid to the variability of point estimates under this approach to statistical modeling, compared to other methods such as regression or ANOVA.

The bootstrap and jackknife are shown to provide fast and accurate ways to circumvent such problems and generate variance estimates for the maximum likelihood parameter estimates in model-based clustering. The performance of such sampling methods in the presence of small clusters requires consideration however; the weighted likelihood bootstrap (WLBS) approach is demonstrated to be effective in addressing this concern in a model-based clustering framework. The standard errors generated by the JK,

BS and WLBS methods can be very insightful in assessing the uncertainty associated with a parameter’s maximum likelihood estimate (MLE). They provide evidence as to the stability of the estimation process in the model fitting algorithm. The procedures are illustrated when clustering using a mixture of Gaussian distributions in both a simulation study and in the case of the *Old Faithful* data, a well-documented multivariate clustering test case. In particular, the methods are considered within the context of the widely used **R** package `mclust`, which facilitates model-based clustering by considering a range of mixtures of Gaussian distributions with various constraints placed on the eigenvalue decomposition of the covariance matrix.

The remainder of the article is structured as follows. Section 2 provides a unified algorithm for the jackknife and bootstrap methods of variance estimation. The differences between the two approaches, which are minimal, are identified as they arise. The motivation for and the details of the weighted likelihood bootstrap approach are also discussed in Section 2.2. Section 3 presents the data sets used – both data sets employed in the simulation study and the *Old Faithful* eruptions data. In Section 4 the results obtained for the illustrative data sets are presented and the article concludes in Section 5 with a discussion of variance estimation in model-based clustering.

2 Sampling based approaches to variance estimation in model based clustering

In a model-based clustering setting each p -dimensional multivariate observation $\underline{x}_i$ belongs to one of G clusters. The matrix of $i = 1, \dots, n$ observations is denoted $\mathbf{X} = (\underline{x}_1, \underline{x}_2, \dots, \underline{x}_n)$. The parameter τ_g is the probability that the observation comes from cluster g , where $\sum_{g=1}^G \tau_g = 1$. The data within group g are modeled by component density $f(\underline{x}_i | \theta_g)$. For a mixture of Gaussian distributions, θ_g comprises of the cluster means $\underline{\mu}_g$ and the covariance matrices Σ_g . The observed data likelihood is the function to be maximized, however calculating maximum likelihood estimates is achieved more easily using the expected complete data likelihood. A classification vector $\underline{z}_i = (z_{i1}, \dots, z_{iG})$ is assumed to exist for each observation $i = 1, \dots, n$ where $z_{ig} = 1$ if observation i belongs to cluster g and $z_{ig} = 0$ otherwise. The complete data likelihood under a finite mixture of Gaussians can be expressed as:

$$L_c = \prod_{i=1}^n \prod_{g=1}^G \left[\tau_g f(\underline{x}_i | \underline{\mu}_g, \Sigma_g) \right]^{z_{ig}} \quad (1)$$

The observed data likelihood is maximized via the widely used EM algorithm (Dempster et al., 1977), which iteratively maximises the expected complete-data log-likelihood. Extensive literature is available on fitting a Gaussian mixture model with a variety of eigendecomposed covariance structures via the EM algorithm (Fraley & Raftery, 1998, 2002), as is considered within the popular **R** package `mclust`.

While the EM algorithm provides an efficient means of parameter estimation in the mixture modeling context, the default output of the EM algorithm does not provide estimates of the uncertainty associated with the parameter estimates. Several approaches have been considered to facilitate the provision of standard errors within the context of the EM algorithm; McLachlan & Krishnan (1997) and McLachlan & Peel (2000) provide thorough reviews. Most existing methods for assessing the covariance matrix of MLEs obtained via the EM algorithm are based on estimating the observed information matrix (Meilijson, 1989; McLachlan & Krishnan, 1997; Meng & Rubin, 1989, 1991). However, while estimating the covariance matrix of the MLEs via the information matrix is valid asymptotically (Boldea & Magnus, 2009); in the case of mixture models, large sample sizes are required for such assumptions to be guaranteed. Efron (1994b) highlights that standard errors are likely to be underestimated under such approaches. Also, none of the existing information matrix based approaches are generalisable in that model specific alterations to the EM algorithm are required. The mixture of Gaussians approach to model-based clustering typically features non-differentiable orthogonal matrices for some covariance structures, which

prohibits implementation of an information matrix-based approach. Furthermore, in certain (typically high dimensional) settings, use of the information matrix is infeasible due to singularity issues.

Sampling based approaches promise an alternative, fast and generalisable approach to providing standard errors. Such methods are detailed in the literature — Diebolt & Ip (1996) employ a conditional bootstrap approach to MLE covariance estimation, the EMMIX software by McLachlan et al. (1999) offers parametric and nonparametric bootstrap facilities for standard error estimation, Basford et al. (1997) and Peel (1998) compare bootstrap and information matrix approaches for Gaussian mixtures and Nyamundanda et al. (2010) employ the jackknife for standard error estimation in the context of mixtures of constrained factor models. In a related area, McLachlan (1987) avails of the bootstrap to aid model selection when clustering. Here, the use of the nonparametric jackknife, bootstrap and weighted likelihood bootstrap sampling methods within the context of the well utilised **R** package `mclust` is described. The latter approach is empirically demonstrated to effectively address the potentially poor performance of sampling based methods in the presence of small clusters.

2.1 The jackknife and bootstrap methods

The jackknife and bootstrap methods are well known approaches to obtaining estimates of the variance associated with parameter estimates. Both are sampling based methods and are straightforward to implement, regardless of the model under consideration. Here, they are considered within the context of model-based clustering (the bootstrap approach has been recently incorporated in the model-based clustering software `mclust` in **R**). By default, `mclust` clusters observations by fitting a range of mixture of Gaussian models (in terms of number of mixture components and the type of covariance structure), and chooses the optimal model using the Bayesian Information Criterion (Schwarz, 1978). In this setting, the algorithm for the bootstrap and jackknife variance estimation techniques proceeds as follows:

- (i) Identify the optimal model structure for the full data set $\mathbf{X}$, denoted $\tilde{M}$, using `mclust`. This model provides the number of groups, G , and the maximum likelihood posterior group membership probability matrix $\hat{\mathbf{Z}}_{\tilde{M}}$. The value $\hat{z}_{ig}$ is the posterior probability that observation i belongs to group g . The full data model $\tilde{M}$ also provides the maximum likelihood distributional parameter estimates $\hat{\underline{\tau}}^{\tilde{M}}$, $\hat{\underline{\mu}}_g^{\tilde{M}}$ and $\hat{\Sigma}_g^{\tilde{M}}$.
- (ii) Form K samples comprising of observations from the original data $\mathbf{X}$.
 - Under the JK approach, each of the $K_{JK} = n$ samples contains $(n - 1)$ observations. Jackknife sample $\mathbf{X}_j$ denotes the sample of the original observations $\mathbf{X}$ with observation j omitted, $j = 1, 2, \dots, n$.
 - Under the BS, each of the K_{BS} samples contains n observations, where the observations are sampled with replacement from $\mathbf{X}$. In this study $K_{BS} = 100$ was found to be sufficient to ensure robust variance estimation, but, erring on the side of caution, $K_{BS} = 200$ was employed for each of the illustrative data sets.
- (iii) For each sample $k = 1, 2, \dots, K$, construct the associated initialization matrix of group membership probabilities $\hat{\mathbf{Z}}_k$. This is populated with the values from the $\hat{\mathbf{Z}}_{\tilde{M}}$ matrix formed using the full data that correspond to each observation sampled. This circumvents the problem of label switching that would otherwise have to be explicitly undone at the end of the algorithm.
- (iv) For each sample, calculate the MLEs of $\underline{\tau}_g$ and θ_g under model $\tilde{M}$. Use the MLEs of the parameters from the full model, $\hat{\underline{\tau}}^{\tilde{M}}$, $\hat{\underline{\mu}}_g^{\tilde{M}}$ and $\hat{\Sigma}_g^{\tilde{M}}$, as starting values for the model fitting process for each BS or JK sample. This greatly improves convergence times for each sample and the speed of the method as a whole.

(v) Estimate the (co)variance of any model parameter.

- The jackknife estimate of the variance of ψ , $\sigma_{JK}^2(\psi)$, is equal to the sample variance of the K_{JK} values of ψ multiplied by the constant term $\frac{(n-1)^2}{n}$, where $\bar{\psi}_{JK}$ denotes the jackknife sample mean:

$$\sigma_{JK}^2(\psi) = \frac{(n-1)}{n} \sum_{m=1}^{K_{JK}} (\psi_m - \bar{\psi}_{JK})^2. \quad (2)$$

- The bootstrap estimate of the variance of any parameter ψ , $\sigma_{BS}^2(\psi)$, is equal to the sample variance of the K_{BS} values of ψ calculated across the bootstrap samples, where $\bar{\psi}_{BS}$ denotes the bootstrap sample mean:

$$\sigma_{BS}^2(\psi) = \frac{1}{(K_{BS} - 1)} \sum_{m=1}^{K_{BS}} (\psi_m - \bar{\psi}_{BS})^2. \quad (3)$$

The bootstrap and jackknife estimates of covariance between parameter estimates can be calculated using analogous formulae.

Using `mclust` to fit the optimal model $\tilde{M}$ to each JK or BS sample, and using the full data model MLEs as starting values for each sample (as described in step (iv)), means the algorithm provides a quick and accurate way of estimating parameter variances.

2.2 The weighted likelihood bootstrap

For cases where one or more of the clusters in the data set contain relatively few observations, it is likely that such clusters will be under-represented in some of the BS (and potentially JK) samples formed. In extreme cases such clusters may be completely unrepresented in some of the samples formed. Consequently the estimation of parameter standard errors corresponding to these clusters will either be highly unstable or not possible.

The weighted likelihood bootstrap (WLBS) approach provides a potential remedy in such circumstances and hence has also been included in the most recent release of `mclust`. The weighted likelihood bootstrap (Newton & Raftery, 1994) originated as a way to simulate approximately from a posterior distribution. In the context of a sampling based approach to variance estimation, the WLBS differs from the JK and BS in that every observation in the data set $\mathbf{X}$ is “present” in each WLBS sample formed. The degree to which each observation is present is measured by its associated ‘weight’. Each weight w_i ($i = 1, \dots, n$) is simulated. As in Newton & Raftery (1994), the uniform Dirichlet distribution is employed for the purposes of simulating the weights here. The implication of using the uniform Dirichlet in this capacity is that the weights are effectively being simulated from an exponential distribution, with scaling provided by the mean of the exponential draws. Other weighting distributions for observations, for example those based on the number of observations present in the cluster to which an observation belongs, could alternatively be used, but were found to yield inferior performance.

The shift to the weighted likelihood bootstrap approach requires that when fitting the model $\tilde{M}$ from the full data to the WLBS sampled data, a weighted form of the complete data likelihood (1) is now maximized:

$$L_{wc} = \prod_{i=1}^n \prod_{g=1}^G \left[\tau_g f(\mathbf{x}_i | \underline{\mu}_g, \Sigma_g) \right]^{z_{ig} w_i} \quad (4)$$

As with the original bootstrap method, outlined in Section 2.1, 200 weighted likelihood bootstrap samples are formed for each of the illustrative data sets by sampling 200 weights vectors; this ensures robust variance estimation. Each sample formed again contains n observations, but sampling with replacement is no longer employed – all n original observations are present in each of the 200 samples formed, but each observation has associated weight w_i . Hence, the WLBS resolves the under-representation of small clusters which arises in the BS (and potentially JK) cases, as each WLBS sample includes all observations.

Variance estimates of model parameters are calculated under the WLBS approach in the same way as they are computed in the BS method outlined in the algorithm in Section 2.1 – with the exception that at step (ii) $K = 200$ WLBS samples are formed by sampling weight vectors from the uniform Dirichlet distribution. Thus, the WLBS also provides a quick and accurate way of estimating parameter variances, even in the presence of small clusters.

3 Illustrative Data Sets

The application and performance of the JK, BS and WLBS approaches to variance estimation detailed in Section 2 are demonstrated through a simulated study and through the use of a well established clustering data set, the *Old Faithful* data.

3.1 Simulated data sets

Two simulation settings are used to illustrate the proposed sampling based approaches to variance estimation, and to assess and compare their performance. Both simulation settings consider a mixture of Gaussians model, one in which $G = 2$ and one in which $G = 3$. In both settings, for illustrative purposes, the number of variables $p = 2$, and in order to thoroughly test performance a small sample size of $n = 150$ was used. Within each simulation setting, four different models are considered, as illustrated in Figures 1 and 2. In brief, the four models examined in each setting consider differently sized clusters with different degrees of cluster separation. The covariance structure used varies between clusters in all instances (i.e. the "VVV" `mclust` model is used). The true parameter values are detailed in Figures 1 and 2 and in Appendix A.

3.2 The *Old Faithful* data

The frequently utilised *Old Faithful* data set is comprised of bivariate observations for 272 eruptions of the Old Faithful geyser in Yellowstone National Park (Azzalini & Bowman, 1990). Each observation records the eruption duration and the waiting duration until the next eruption, both measured in minutes; the data are illustrated in Figure 3. This is a classic test case for any clustering methodology because the data are multimodal. However, there are no “true” group labels available – the presence of various numbers of groups has been suggested, depending on the clustering rule applied.

4 Results

The application and performance of the JK, BS and WLBS approaches to variance estimation are illustrated using the data sets outlined in Section 3. For both the simulation study and the *Old Faithful* data, maximum likelihood estimates of the parameter values and their associated standard errors are presented for the JK, BS and WLBS methods.

4.1 Simulation study

The simulation settings described in Section 3.1 serve as a means of assessing the accuracy of the sampling-based approaches to parameter variance estimation, in different clustering scenarios.

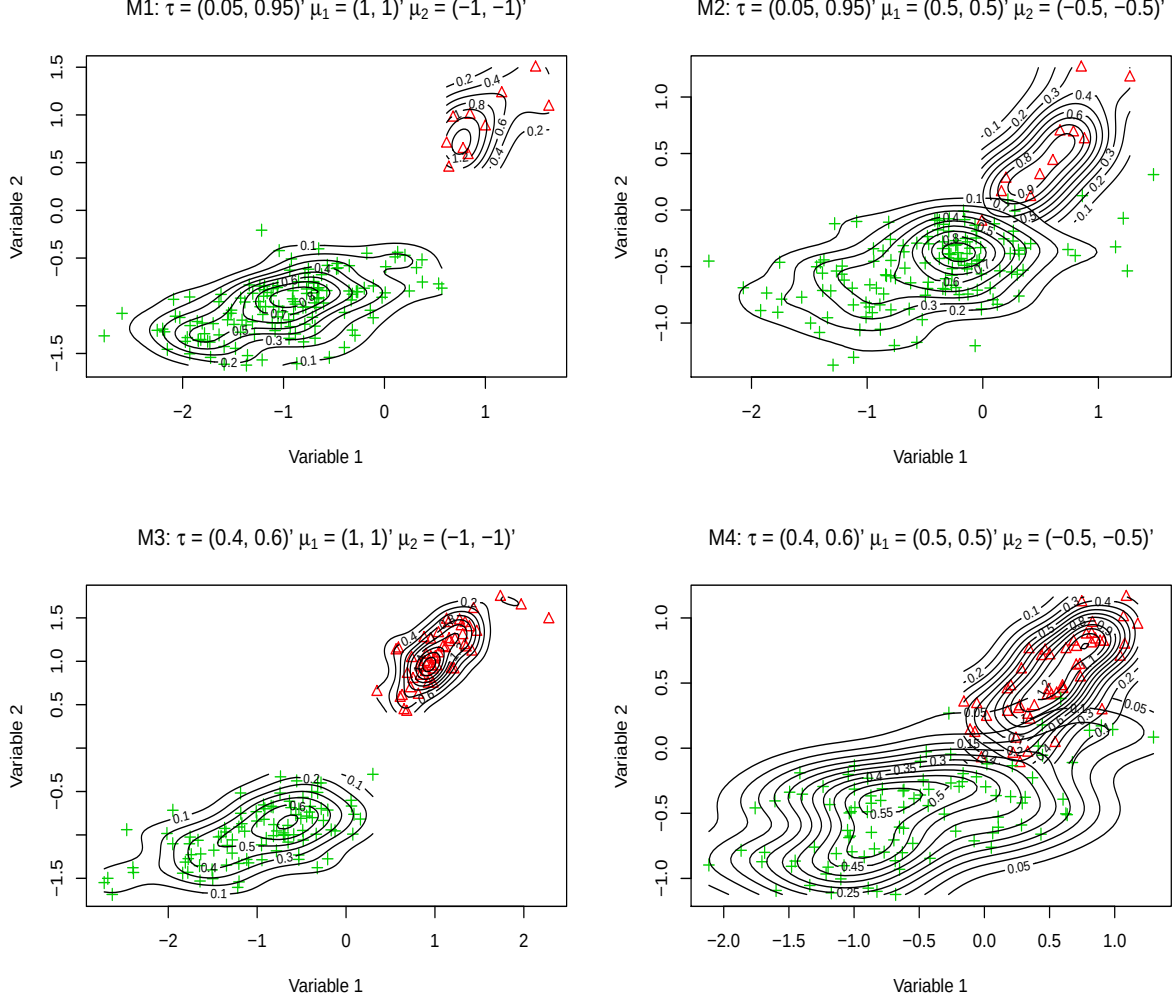


Figure 1: Scatter plot for a single simulated data set ($n = 150$) from each of the four models (M1, M2, M3 and M4) considered in the $G = 2$ simulation setting. M1 and M2 consider the case where a small cluster is present; M3 and M4 consider more equally sized clusters. M1 and M3 consider non-overlapping clusters whereas M2 and M4 consider overlapping clusters. True parameter settings are detailed above each figure.

4.1.1 Simulation setting one: $G = 2$.

For the first simulation setting, where two clusters are present, Table 1 presents the cluster probability estimates and associated standard errors, based on a single simulated data set under each of the models M1, M2, M3 and M4 with $n = 150$, for the JK, BS and WLBS methods. It is clear that, for models M1, M3 and M4, all methods produce cluster probability estimates that are very close to the true values and that the standard errors are relatively small. Performance is mixed however for the more challenging model M2, in which a small cluster is present and the clusters overlap. Both the JK and WLBS approaches over-estimate the size of the smaller cluster in this case, and the standard errors are larger than in model M1, which also has a small cluster present. Under the BS, parameter estimation in the M2 setting was not feasible, attributable to the inability to fit the optimal model $\tilde{M}$ to the simulated data set. Also notable is that, when moving from M3 to M4, while parameter estimates appear unchanged, the standard errors increase due to the increased cluster overlap, and the resulting poor clustering performance (in terms

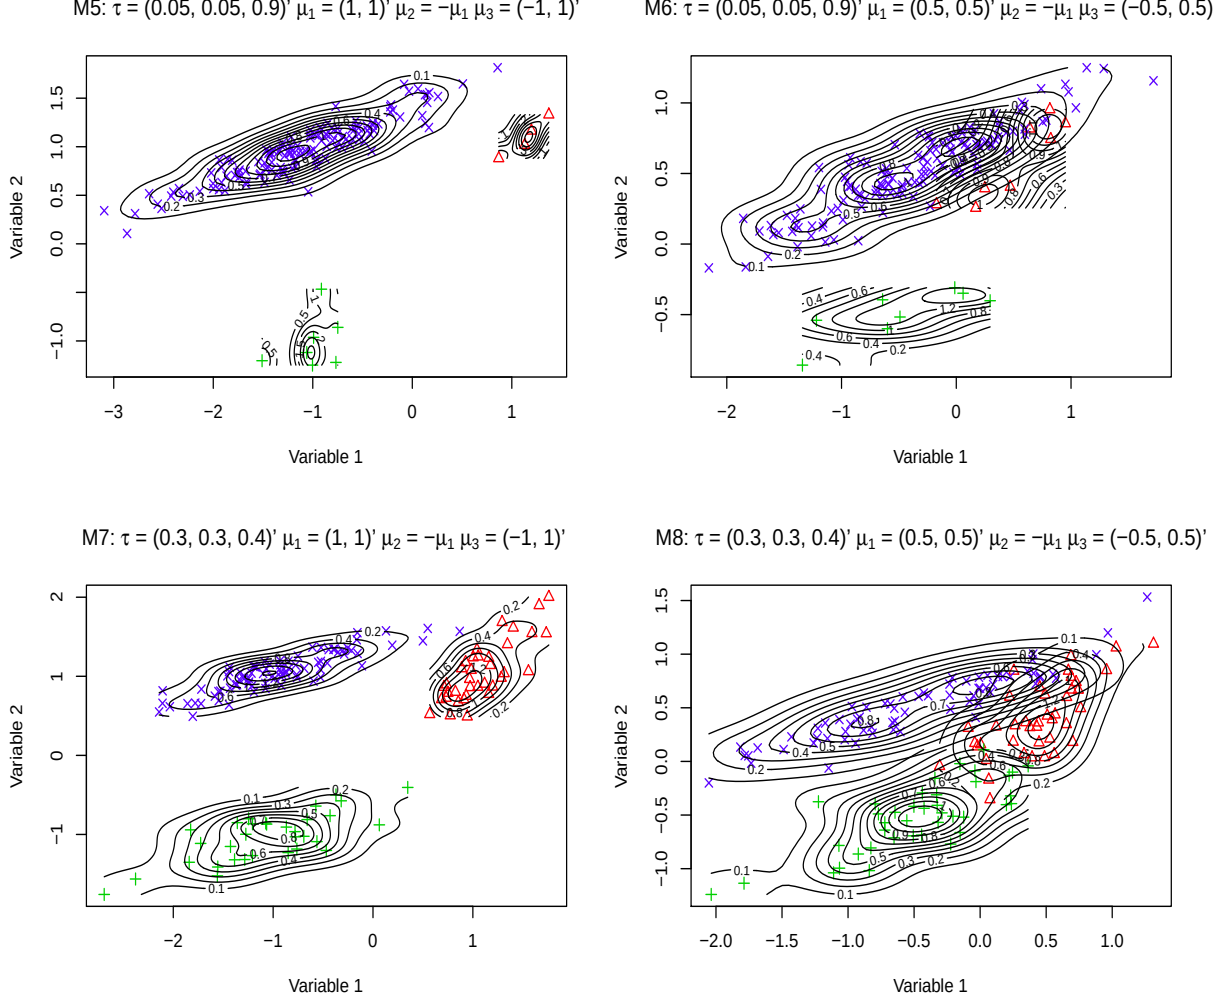


Figure 2: Scatter plot for a single simulated data set ($n = 150$) from each of the four models (M5, M6, M7 and M8) considered in the $G = 3$ simulation setting. M5 and M6 consider the case where small clusters are present; M7 and M8 consider more equally sized clusters. M5 and M7 consider non-overlapping clusters whereas M6 and M8 consider overlapping clusters. True parameter settings are detailed above each figure.

of misclassification rate). Similar observations arose when examining the cluster mean and covariance estimates and standard errors for the four models.

To further assess the performance of the methods, 1000 data sets were generated under each of the models M1, M2, M3 and M4. For each data set an approximate 95% confidence interval (mean ± 2 standard errors) was formed for each model parameter. The number of data sets for which the confidence interval contained the true parameter value was recorded; the results are presented in Table 2 for the first group membership probability parameter τ_1 . In accordance with the inference drawn from Table 1, the JK and WLBS give very good coverage of the true value of τ_1 , even in the challenging M2 setting. The BS method performs poorly when a small cluster is present (M1 and M2), and all methods give lower coverage values when a small cluster is present, again attributable to the inability to fit the optimal model in many cases. Similar trends were observed when examining the coverage results for the other model parameters.

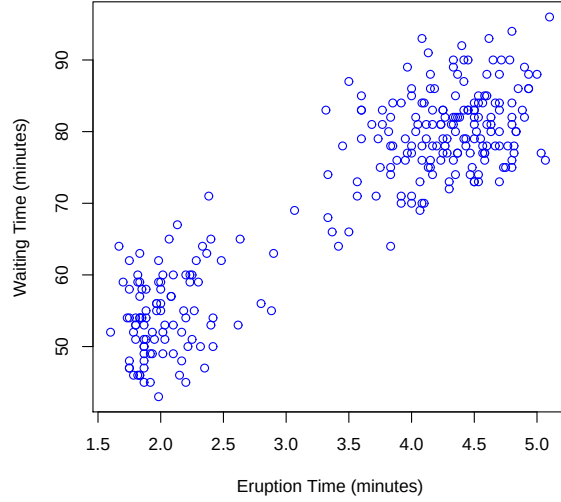


Figure 3: Scatter plot of the *Old Faithful* data.

Table 1: Cluster probability estimates (with associated standard errors) for a data set simulated under each of the four models detailed in Figure 1 where $G = 2$, under each of the variance estimation approaches.

	$\mathcal{I}_{TRUE}$	$\mathcal{I}_{JK}$	$\mathcal{I}_{BS}$	$\mathcal{I}_{WLBS}$
M1	{0.05, 0.95}	{0.07 (0.02), 0.93 (0.02)}	{0.08 (0.03), 0.92 (0.03)}	{0.08 (0.02), 0.92 (0.02)}
M2	{0.05, 0.95}	{0.13 (0.04), 0.87 (0.04)}	NA	{0.14 (0.05), 0.86 (0.05)}
M3	{0.4, 0.6}	{0.38 (0.04), 0.62 (0.04)}	{0.38 (0.04), 0.62 (0.04)}	{0.38 (0.04), 0.62 (0.04)}
M4	{0.4, 0.6}	{0.38 (0.06), 0.62 (0.06)}	{0.38 (0.08), 0.62 (0.08)}	{0.38 (0.09), 0.62 (0.09)}

Table 2: Coverage results i.e. the number of data sets for which the true probability of membership of cluster one is within the JK, BS and WLBS confidence intervals for the models M1, M2, M3 and M4, where $G = 2$. Also reported are the number of simulated data sets to which it was possible to fit the optimal model $\tilde{M}$. A total of 1000 data sets was simulated under each model.

	Coverage			Number fitted		
	JK	BS	WLBS	JK	BS	WLBS
M1	955	198	951	979	215	969
M2	689	190	663	984	329	829
M3	937	926	928	1000	1000	1000
M4	816	881	890	1000	1000	1000

To summarize Tables 1 and 2, the simulation study indicates that (a) in the setting of roughly equally sized clusters, all three sampling based approaches perform equivalently well, but that over-estimation of a small cluster's size occurs in the case of such a small cluster being present (b) large standard errors may be indicative of poor clustering performance, possibly due to the presence of overlapping clusters and (c) the JK and WLBS should be used instead of the BS, particularly when small clusters are present.

4.1.2 Simulation setting two: $G = 3$.

A second, similar simulation study was conducted for the case where a larger number of clusters was considered i.e. $G = 3$. Table 3 presents the cluster probability estimates and associated standard errors, based on a single simulated data set under each of the models M5, M6, M7 and M8 with $n = 150$, for the JK, BS and WLBS methods. The performance of the three approaches in the $G = 3$ case is similar to that summarized at the end of Section 4.1.1. Interestingly however, the standard errors are larger in the WLBS case for M5 (non-overlapping clusters) than for M6 (overlapping clusters), which upon examination was due to poor clustering performance for the particular data set simulated under M5.

Table 3: Cluster probability estimates (with associated standard errors) for a data set simulated under each of the four models detailed in Figure 2 where $G = 3$, under each of the variance estimation approaches. In the case of the BS it was not feasible to fit the optimal model to the simulated data set under models M5, M6 and M8. **Under model M7 the cluster probability and associated standard errors were $\mathcal{I}_{BS} = \{0.28 (0.04), 0.32 (0.04), 0.40 (0.04)\}$.

	$\mathcal{I}_{TRUE}$	$\mathcal{I}_{JK}$	$\mathcal{I}_{BS}$	$\mathcal{I}_{WLBS}$
M5	{0.05, 0.05, 0.9}	{0.15 (0.03), 0.07 (0.03), 0.78 (0.04)}	NA	{0.15 (0.03), 0.10 (0.10), 0.75 (0.11)}
M6	{0.05, 0.05, 0.9}	{0.11 (0.03), 0.04 (0.02), 0.85 (0.04)}	NA	{0.11 (0.03), 0.04 (0.02), 0.85 (0.03)}
M7	{0.3, 0.3, 0.4}	{0.29 (0.04), 0.32 (0.04), 0.39 (0.04)}	**	{0.29 (0.04), 0.32 (0.04), 0.39 (0.04)}
M8	{0.3, 0.3, 0.4}	{0.27 (0.13), 0.35 (0.08), 0.38 (0.08)}	NA	{0.26 (0.08), 0.35 (0.07), 0.39 (0.05)}

Again, 1000 data sets were then generated under each of the models M5, M6, M7 and M8. For each data set an approximate 95% confidence interval was formed for each model parameter. Table 4 reports the number of data sets for which the confidence interval contained the true τ_1 value. Clearly coverage performance is poorer in the $G = 3$ setting than in the $G = 2$ setting (Table 2), possibly attributable to the small number of observations ($n = 150$) and the challenging simulation parameter settings.

Table 4: Coverage results i.e. the number of data sets for which the true probability of membership of cluster one is within the JK, BS and WLBS confidence intervals for the models M5, M6, M7 and M8, where $G = 3$. Also reported are the number of simulated data sets to which it was possible to fit the optimal model $\tilde{M}$. A total of 1000 data sets was simulated under each model.

	Coverage			Number fitted		
	JK	BS	WLBS	JK	BS	WLBS
M5	430	68	366	972	143	776
M6	691	63	340	937	103	463
M7	950	944	945	1000	1000	1000
M8	795	767	786	998	872	900

4.2 Old Faithful results

While Section 4.1 demonstrated the advantages and disadvantages of the sampling based methods through a simulation study, here the utility of the methods is illustrated through a real clustering problem where true parameter estimates are unknown. For the *Old Faithful* data, under `mclust`, the optimal mixture of Gaussians model has $G = 3$ components and common covariance structure $\Sigma_g = \Sigma$ across groups. The results for the estimation of parameters and their associated uncertainties under the optimal model are presented in Figure 4 and in Appendix B. The standard errors for all parameters under each method are small relative to the size of the parameter estimates themselves. The standard errors using the BS and

$$\begin{aligned}
\mathcal{I}_{JK} &= \begin{pmatrix} 0.46 (0.04) & 0.36 (0.03) & 0.18 (0.04) \\ 0.47 (0.05) & 0.36 (0.03) & 0.17 (0.04) \\ 0.48 (0.06) & 0.36 (0.03) & 0.16 (0.05) \end{pmatrix} \\
\mathcal{I}_{BS} &= \begin{pmatrix} 0.46 (0.04) & 0.36 (0.03) & 0.18 (0.04) \\ 0.47 (0.05) & 0.36 (0.03) & 0.17 (0.04) \\ 0.48 (0.06) & 0.36 (0.03) & 0.16 (0.05) \end{pmatrix} \\
\mathcal{I}_{WLBS} &= \begin{pmatrix} 0.46 (0.04) & 0.36 (0.03) & 0.18 (0.04) \\ 0.47 (0.05) & 0.36 (0.03) & 0.17 (0.04) \\ 0.48 (0.06) & 0.36 (0.03) & 0.16 (0.05) \end{pmatrix} \\
\mu_{JK} &= \begin{pmatrix} 4.47 (0.03) & 2.04 (0.03) & 3.81 (0.06) \\ 80.89 (0.47) & 54.49 (0.60) & 77.62 (1.18) \end{pmatrix} \\
\mu_{BS} &= \begin{pmatrix} 4.47 (0.04) & 2.03 (0.03) & 3.79 (0.12) \\ 80.86 (0.62) & 54.45 (0.60) & 77.37 (2.17) \end{pmatrix} \\
\mu_{WLBS} &= \begin{pmatrix} 4.46 (0.05) & 2.03 (0.02) & 3.76 (0.14) \\ 80.81 (0.53) & 54.44 (0.62) & 76.97 (2.52) \end{pmatrix}
\end{aligned}$$

Figure 4: JK, BS and WLBS maximum likelihood parameter estimates and associated standard errors for the optimal mixture of Gaussians model for the *Old Faithful* data, where $G = 3$ and $p = 2$. Covariance parameter estimates and associated standard errors are detailed in Appendix B.

WLBS are slightly larger than their JK counterparts for most parameters. This is to be expected as there is likely to be much less variability in the estimates arising from the JK samples than would be observed in the BS or WLBS cases, as each JK sample differs only by one observation. On the other hand the BS and WLBS samples are likely to differ from each other to a greater degree. Similar results have been presented previously for this data set in a univariate context (Everitt & Hothorn, 2009, page 139–155).

The sampling based approaches to variance estimation discussed provide not only estimates of the model parameters, but also insight as to their associated uncertainty, which can be graphically illustrated. Figure 5 provides kernel density plots for the mean waiting duration and eruption duration for all three clusters. The plots indicate good agreement between the BS and WLBS approaches; notably the WLBS densities are flatter in some cases. In addition, the kernel density plots for the model’s covariance parameters are provided in Figure 6; the parameter measuring covariance between waiting duration and eruption duration exhibits a slightly ‘bumpy’ WLBS density estimate, indicating some degree of sensitivity of parameter estimation to the nature of the sample formed. Plotting the JK density estimates for the model parameters results in very bumpy, and very narrow densities. This is due to the similarity of the JK samples, and therefore the parameter estimates themselves.

From a computational perspective, all three variance estimation approaches are very efficient. In the context of clustering the *Old Faithful* data, the JK, BS and WLBS approaches to variance estimation required 2.3s, 2.8s and 25.7s to run respectively on a 2.8 GHz Mac OS X laptop, where 200 samples were drawn in the BS and WLBS settings. The marked increase in the WLBS setting over the JK and BS settings is due to the required maximization of the weighted complete data likelihood, but the overall computational cost is still cheap from a user perspective.

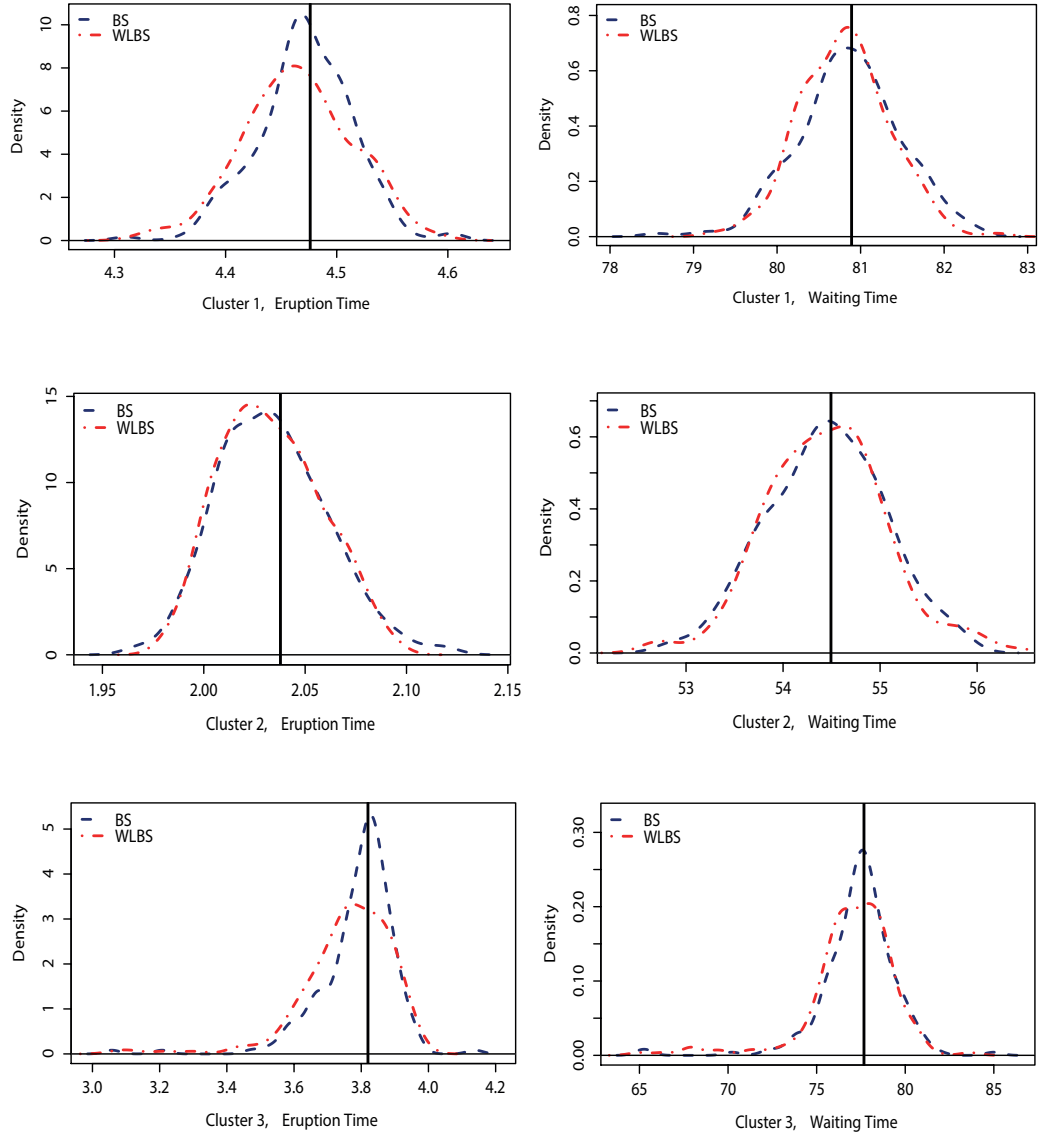


Figure 5: Kernel density plots of the BS and WLBS estimates of the μ parameters for the *Old Faithful* data. The broken lines represent the BS and WLBS kernel densities. The solid lines represent the values of the MLEs from the model fitted to the full data set.

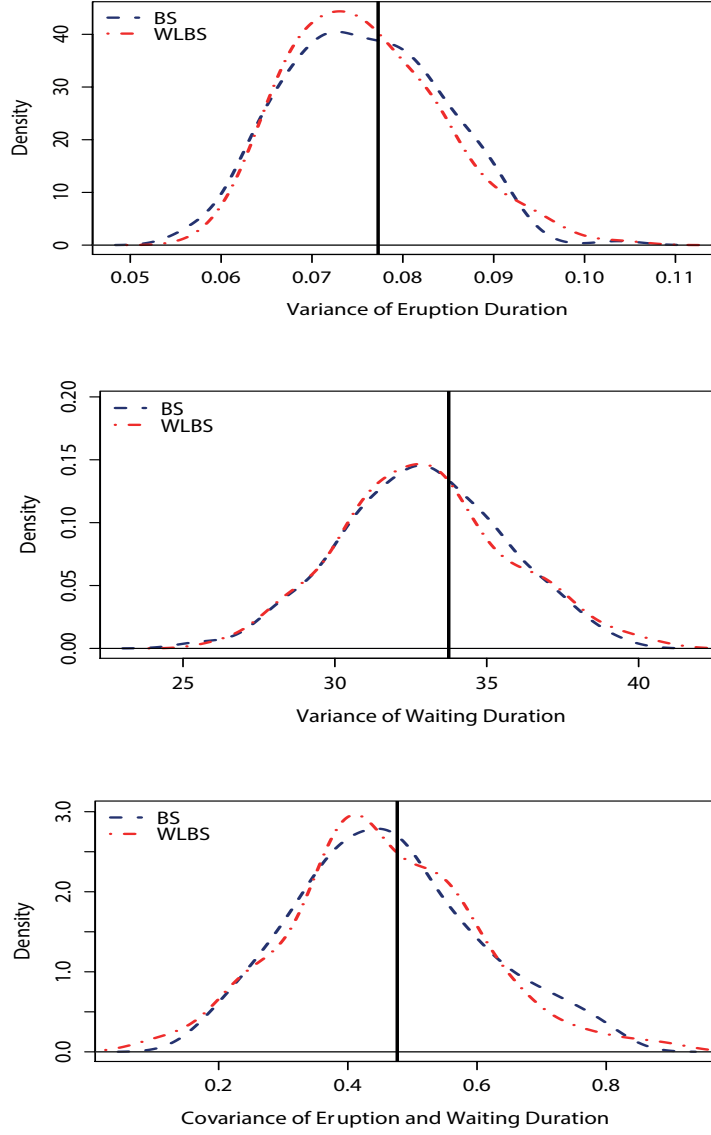


Figure 6: Kernel density plots of the BS estimates of the Σ parameters for the *Old Faithful* data. The broken lines represent the BS and WLBS kernel densities. The solid lines represent the values of the MLEs from the model fitted to the full data set.

5 Discussion and Further Work

Although model-based clustering is now a widely used approach to clustering in a range of disciplines, especially through the use of the `mclust` package in **R**, little attention has previously been paid to providing estimates of the variance associated with parameter estimates. Here, three sampling based approaches to variance estimation are discussed in the context of model-based clustering. The jackknife and bootstrap approach to variance estimation are basic tools in any statisticians' toolkit, but difficulties with the bootstrap in particular arise in the clustering context when small clusters are present. The weighted likelihood bootstrap addresses this shortcoming. The WLBS has been shown to perform as well as the JK and BS in general, and particularly well in the presence of small clusters. In terms of which sampling based approach the practitioner should use to obtain variance estimates, the simulation study and real application presented here suggest that when roughly similarly sized clusters are present, all three methods perform equally well. In the presence of small clusters however, the JK and WLBS are much more stable than the BS.

The standard errors calculated from the JK, BS and WLBS have several practical uses including formation of approximate confidence intervals for parameter estimates, construction of hypothesis tests as to whether parameters should be included in the model and analysis of the bias of maximum likelihood parameter estimates versus their JK/BS/WLBS counterparts as a means of assessing model goodness of fit. In a similar vein, the sampling based methods discussed could be employed as an aid to model selection. Simulation studies suggest that fitting more clusters than are truly present results in larger parameter variances than those produced when fitting the true model. Moreover, the BS and WLBS often fail to fit over-specified models, as the covariance structure of the model is defined by the optimal model from the full data set $\tilde{M}$ and this is often too restrictive. The sampling based approaches can also be used to quantify the uncertainty in BIC values for model selection, again within the context of `mclust`. In the case of the JK this works well, but the aforementioned problems with the BS and WLBS and over-specified models causes problems.

Further avenues of research are plentiful and varied. For example, an application that would perhaps be of interest to an `mclust` user would be the quantification of the standard errors of the parameters constituting the eigenvalue decomposition of the covariance matrix into its size, orientation and shape components, $\Sigma_g = \lambda_g D_g A_g D_g^T$. This may aid in the process of model specification, namely in determining which parameters could be set equal across groups to achieve a more parsimonious decomposition. Specific to the weighted likelihood bootstrap method, a more thorough investigation of alternative Dirichlet parameterisations or alternative weighting distributions could be conducted to examine their stability and suitability in settings where some clusters are sparsely populated.

Acknowledgements

This work is supported by the Insight Research Centre (SFI/12/RC/2289) and Science Foundation Ireland under the Research Frontiers Programme (2007/RFP/MATH281).

References

- A. Azzalini & A. Bowman (1990). 'A look at some data on the Old Faithful geyser'. *Applied Statistics* **39**:357–365.
- K. Basford, et al. (1997). 'Standard errors of fitted means under normal mixture models.'. *Computational Statistics* **12**:1–17.
- O. Boldea & J. Magnus (2009). 'Maximum Likelihood Estimation of the Multivariate Normal Mixture Model'. *Journal of the American Statistical Association* **104**:1539–1549.

- A. Dempster, et al. (1977). ‘Maximum Likelihood from Incomplete Data via the EM Algorithm’. *Journal of the Royal Statistical Society, Series B* **39**:1–38.
- J. Diebolt & E. Ip (1996). ‘Stochastic EM: method and application’. In S. R. W.R. Gilks & D. Spiegelhalter (eds.), *Markov Chain Monte Carlo in Practice*, pp. 259–273. Chapman & Hall, London.
- B. Efron (1981). ‘Nonparametric estimates of standard error: The jackknife, the bootstrap and other methods’. *Biometrika* **68**:589–599.
- B. Efron (1994a). *An Introduction to the Bootstrap*. Chapman & Hall, London.
- B. Efron (1994b). ‘Missing data, imputation and the bootstrap (with discussion)’. *Journal of the American Statistical Association* **89**:463–479.
- B. Efron & C. Stein (1981). ‘The jackknife estimate of variance’. *The Annals of Statistics* **9**(3):586–596.
- B. S. Everitt & T. Hothorn (2009). *A Handbook of Statistical Analyses Using R, Second Edition*. Chapman & Hall, London.
- C. Fraley & A. E. Raftery (1998). ‘How many clusters? Which clustering method? Answers via Model-Based Cluster Analysis’. *Computer Journal* **41**:578–588.
- C. Fraley & A. E. Raftery (2002). ‘Model-based clustering, discriminant analysis, and density estimation’. *Journal of the American Statistical Association* **97**(458):611–612.
- G. McLachlan (1987). ‘On bootstrapping the likelihood ratio test statistic for the number of components in a normal mixture.’. *Journal of the Royal Statistical Society Series C (Applied Statistics)* **36**:318–324.
- G. McLachlan, et al. (1999). ‘Fitting mixtures of normal and t -components’. *Journal of Statistical Software* **4**(2).
- G. J. McLachlan & T. Krishnan (1997). *The EM algorithm and extensions*. John Wiley & Sons Inc., New York.
- G. J. McLachlan & D. Peel (2000). *Finite mixture models*. John Wiley & Sons Inc., New York.
- I. Meilijson (1989). ‘A fast improvement to the EM algorithm on its own terms’. *Journal of the Royal Statistical Society, Series B* **51**:127–138.
- X. Meng & D. Rubin (1991). ‘Using EM to obtain asymptotic variance-covariance matrices: the SEM algorithm’. *Journal of the American Statistical Association* **86**:899–909.
- X. L. Meng & D. Rubin (1989). ‘Obtaining asymptotic variance-covariance matrices for missing-data problems using EM.’. In *Proceedings of the American Statistical Association (Statistical Computing Section)*, pp. 140–144, Alexandria, Virginia. American Statistical Association.
- M. A. Newton & A. E. Raftery (1994). ‘Approximate Bayesian inference with the weighted likelihood bootstrap’. *Journal of the Royal Statistical Society. Series B (Methodological)* pp. 3–48.
- G. Nyamundanda, et al. (2010). ‘Probabilistic principal component analysis for metabolomic data’. *BMC Bioinformatics* **11**(1):571.
- D. Peel (1998). *Mixture Model Clustering and Related Topics*. Ph.D. thesis, University of Queensland, Brisbane.
- M. Quenouille (1956). ‘Notes on bias in estimation’. *Biometrika* **43**(2):343–348.

- G. Schwarz (1978). ‘Estimating the dimension of a model’. *Annals of Statistics* **6**:461–464.
- J. Tukey (1958). ‘Bias and confidence in not-quite large samples (abstract)’. *The Annals of Mathematical Statistics* **29**(2):614.

A True cluster covariance matrices for the simulation study.

$$\Sigma_1^{TRUE} = \begin{pmatrix} 0.12 & 0.09 \\ 0.09 & 0.12 \end{pmatrix}$$

$$\Sigma_2^{TRUE} = \begin{pmatrix} 0.47 & 0.13 \\ 0.13 & 0.11 \end{pmatrix}$$

Figure 7: The true cluster covariance matrices, Σ_1^{TRUE} and Σ_2^{TRUE} , for the $G = 2$ simulation setting, for models M1, M2, M3 and M4.

$$\Sigma_1^{TRUE} = \begin{pmatrix} 0.12 & 0.09 \\ 0.09 & 0.12 \end{pmatrix}$$

$$\Sigma_2^{TRUE} = \begin{pmatrix} 0.39 & 0.15 \\ 0.15 & 0.10 \end{pmatrix}$$

$$\Sigma_3^{TRUE} = \begin{pmatrix} 0.53 & 0.20 \\ 0.20 & 0.09 \end{pmatrix}$$

Figure 8: The true cluster covariance matrices, Σ_1^{TRUE} , Σ_2^{TRUE} and Σ_3^{TRUE} , for the $G = 3$ simulation setting, for models M5, M6, M7 and M8.

B Covariance parameter estimates and standard errors for the Old Faithful data

$$\Sigma_{JK} = \begin{pmatrix} 0.08 (0.01) & 0.47 (0.12) \\ 0.47 (0.12) & 33.73 (2.77) \end{pmatrix}$$

$$\Sigma_{BS} = \begin{pmatrix} 0.08 (0.01) & 0.46 (0.14) \\ 0.46 (0.14) & 32.88 (2.65) \end{pmatrix}$$

$$\Sigma_{WLBS} = \begin{pmatrix} 0.08 (0.01) & 0.45 (0.14) \\ 0.45 (0.14) & 32.94 (2.76) \end{pmatrix}$$

Figure 9: Cluster covariance maximum likelihood estimated values (with associated standard errors) for the optimal mixture of Gaussians model for the *Old Faithful* data, where $G = 3$, $p = 2$ and the optimal model has equal covariance structure across clusters.